


STAINLESS STEEL HOUSINGS

This robust system is built tough for whole house and Industrial/Commercial cold /hot water filtration

FEATURES

- Heavy duty stainless steel 316 head and housing
- Unrestricted flow design
- “Sure Seal” ring nut connector with tightening bar
- High pressure (300psi) housing design
- High temperature 300°F or 149°C)

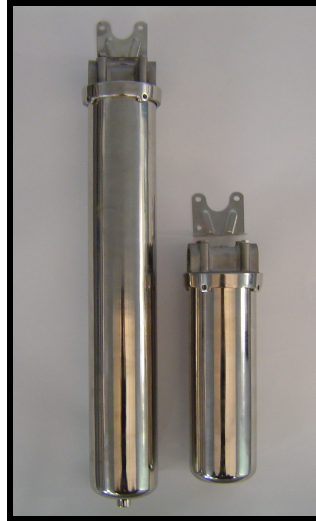

BENEFITS

- Maximum strength and durability where water hammer occurs.
- For High flow rates with minimal pressure drops
- Assures absolute seal
- Will not leak !!

PART #	DESCRIPTION	DIMENSIONS		MAX. OPERATING PRESSURE	FLOW RATE
		H	D		
ST-1	10" housing 3/4" OR 1" NPT ports	327mm	105mm	300 psi	10 GPM
ST-2	20" housing 3/4" OR 1" NPT ports	578mm	105mm	300 psi	15 GPM
ST-3	40" housing 3/4" NPT ports	822mm	105mm	300psi	20 GPM

FAST CARTRIDGE CHANGE OUT !!

ITS EASY AS 1 - 2 - 3

- 1) Close valve on inlet side and open a tap nearest the filter to relieve water pressure
- 2) Use tightening bar (included) to loosen “sure seal” ring nut connector and remove sump.
- 3) Remove and replace the cartridge.

HOUSINGS INCLUDE:

- Heavy duty 316 stainless steel housing
- Stainless steel mounting bracket
- Filter tightening Bar