



WS SERIES WATER SOFTENER CARTRIDGES

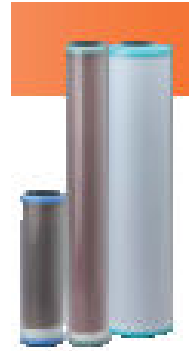

- FEATURES**
- Cation softener resin media
 - Polypropylene construction
 - 37.8° C Temperature rating
 - Reduces hardness and scale deposits
 - Available in four sizes and flow rates.

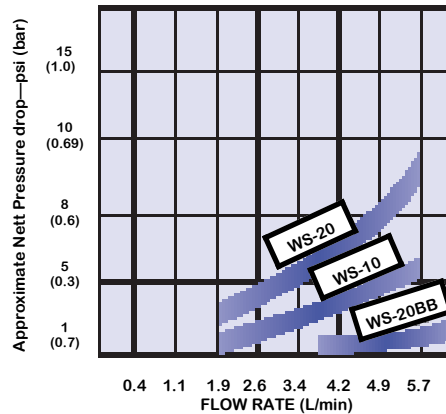

MODEL	DIMENSIONS	RECOMMENDED FLOW RATES	CAPACITY (Mg/L)
WS-10	67MM X 248MM	1.9L/MIN	50,000
WS-20	67MM X 508MM	2.8L/MIN	100,000
WS10BB	114MM X 248MM	4.5 L/MIN	150,000
WS20BB	114MM X 508MM	8.5L/MIN	300,000

SOFTENING CAPACITY WS SERIES CARTRIDGES (CAPACITY IN LITRES)

HARDNESS (PPM)	20	40	60	80	100	120	140	160	180	200
WS10	2500	1250	833	625	500	417	357	313	278	250
WS20	5000	2500	1667	1250	1000	833	714	625	556	500
WS10BB	7500	3750	2500	1875	1500	1250	1071	938	833	750
WS20BB	15000	7500	5000	3750	3000	2500	2143	1875	1667	1500